



Storage Rack And
CATALOG
Fencing System



13671956111



metalx@yishuofence.com



www.yishuofence.com

HEBEI YISHUO BUILDING MATERIALS TECHNOLOGY CO., LTD



ABOUT US



HEBEI YISHUO is committed to quality manufacturing and excellent customer service on high-tech fence and related metal products.

We are located in tiangongying Township, Xinji City, Hebei Province, 2 kilometers away from Anping the hometown of wire mesh. Our factory covering an area of 10,000,000 sqm, we are a production / R & D enterprise.

After 30 years of innovation-driven development, we has become China' S leading manufacturer and exporter of wire mesh&metal products.

Our factory has laser cutting equipment, welding equipment, spraying production line, stamping equipment, wire drawing equipment and a series of production processes completed independently.

Therefore, we can better control the quality and delivery time, and guarantee to give customers better prices. In addition, we have our own production and R & D department, which can accept different cooperation methods such as processing with supplied materials, processing with supplied samples and OEM ODM production.



>> CATALOG

- 01 3D Curved Mesh Fence
- 04 358 Fence
- 07 868 Fence
- 10 Chain Link Fence
- 13 Chicken Coop Run
- 16 Dog Cage
- 19 Edge protection Fence
- 22 Ornametal Fence
- 25 Palisade Fence
- 29 Estate Fence
- 31 Australia Tempoary
- 34 Canada Tempoary
- 37 Crowed Control Barrier
- 40 Machine And Robot Safety barrier Fence
- 46 Explosion-proof barriers
- 49 Corral Panels
- 52 Razor Wire
- 55 Vineyard Post
- 58 Duty Racks (Light Duty Racks, Medium Duty Racks, Heavey Duty Racks)
- 64 Metal pallet



3D Curved Mesh 折弯护栏

3D Curved Mesh Fence also known as 3D security fence, it is a kind of specially designed welded wire mesh with V-shaped bending curves in its longitudinal direction. It is made of high quality carbon steel wires where wires in the horizontal and vertical direction are welded at their junctions to provide a rigid wire mesh fence.

3D 折弯护栏，又称 3D 安全围栏，是一种经过特别设计的焊接金属网，其纵向方向上具有 V 形弯曲的曲线。它由优质碳钢丝制成，水平和垂直方向上的钢丝在交界处通过焊接连接在一起，从而形成坚固的网状围栏。

Galvanized

镀锌



Powder coated

粉末涂层



3D CURVED MESH FENCE 折弯护栏

ACCESSORIES 配件

Peach post connection

桃形接头连接



Spider clip connection

蜘蛛夹连接




Square clip

正方形夹



Round post clip


圆形柱形夹

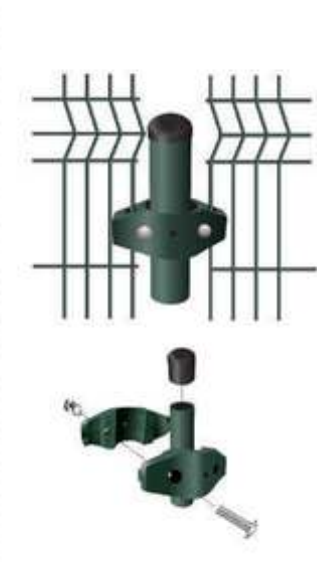

SPECIFICATION 规格说明

Relations between fence height and the number of folds

围栏高度与折叠次数之间的关系

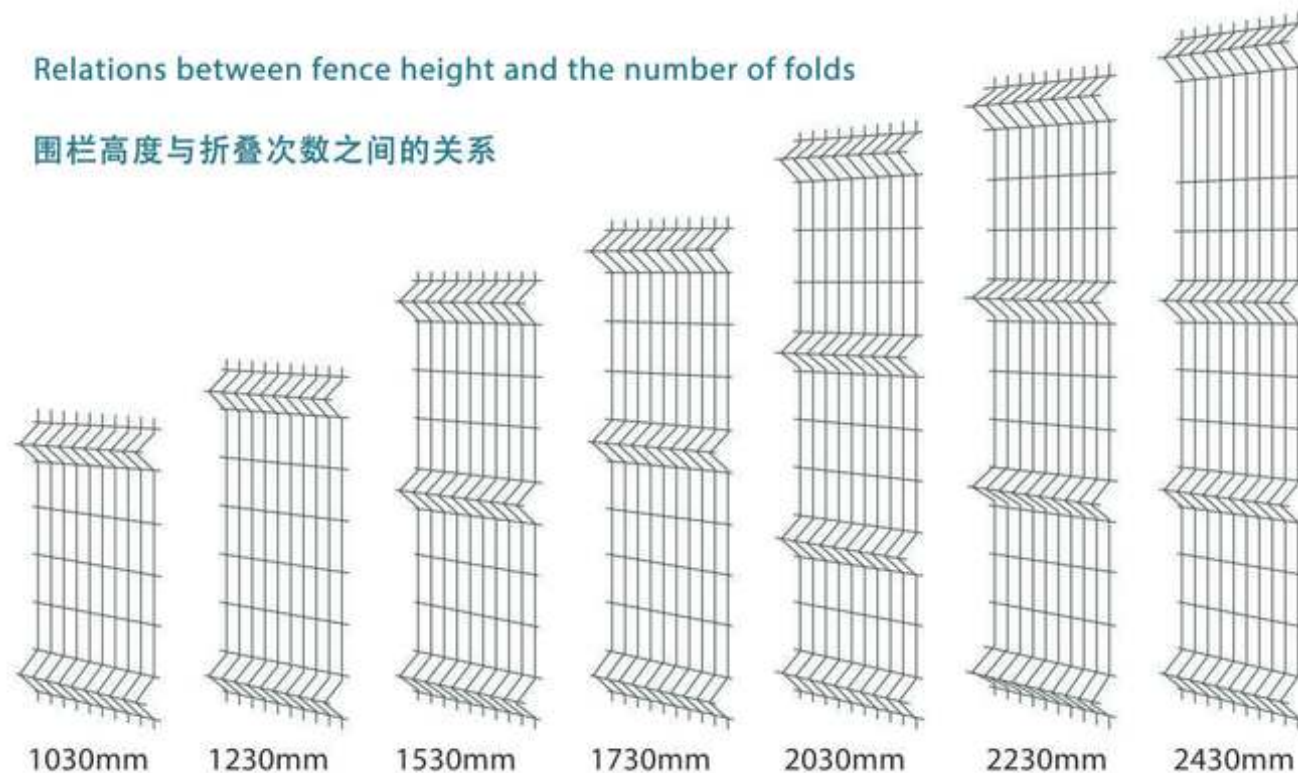

3D CURVED MESH FENCE 折弯护栏

Height: 630 mm, 830 mm, 1030 mm, 1230 mm, 1530 mm, 1730 mm, 1830 mm, 2030 mm, 2430 mm

Width: 2000 mm, 2500 mm

Wire Diameter: 3.0 mm, 3.5 mm, 4.0 mm, 4.5 mm, 5.0 mm

Mesh opening: 50 x 100 mm, 50 x 150 mm, 50 x 200 mm, 75 x 100 mm, etc.

Clamp: metal clamp/anti-UV plastic clamp/ no clamp (for peach post)

Post Cap: metal cap / anti-UV plastic cap.

高度: 630 毫米、830 毫米、1030 毫米、1230 毫米、1530 毫米、1730 毫米、1830 毫米、2030 毫米、2430 毫米

宽度: 2000 毫米、2500 毫米

电线直径: 3.0 毫米、3.5 毫米、4.0 毫米、4.5 毫米、5.0 毫米

网眼尺寸: 50x100 毫米、50x150 毫米、50x200 毫米、75x100 毫米等

夹具: 金属夹具/防紫外线塑料夹具/无夹具 (用于桃形柱)

柱帽: 金属帽/防紫外线塑料帽。



358 high security fence, also known as anti-climb fence, is a kind of superior high tensile and high security welded wire mesh fence. The fence name 358 comes from its panel with a mesh opening of 3" x 0.5" and a wire diameter of 8-gauge (approximate to 76.2 mm x 12.7 mm x 4 mm). It is designed to be a robust, anticlimb and anti-cut barrier to provide high security protection.

358 型高安全性围栏, 又称防攀爬围栏, 是一种性能卓越、高强度且具有高安全性的焊接金属网围栏。该围栏的名称“358”源于其面板上的网孔尺寸为 3 英寸×0.5 英寸, 以及线材直径为 8 号规格 (约 76.2 毫米×12.7 毫米×4 毫米)。其设计旨在成为坚固、防攀爬且防切割的屏障, 以提供高度的安全防护。

PHOTOES * 照片



Anti-climb Performance

防滑性能



Anti-cut Performance

防割性能



DETAILA * 细节

Clamp bar connection

夹紧杆连接





Spider bar connection

蜘蛛架连接件



ACCESSORIES * 配件

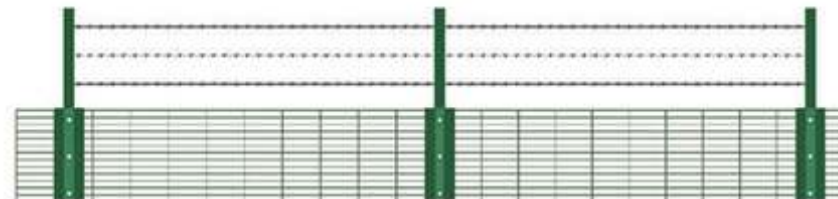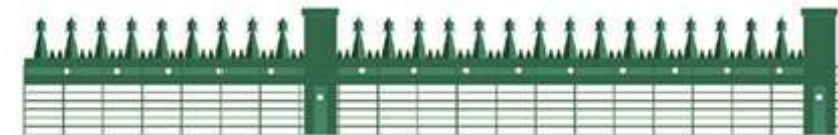Razor Wires
刀片刺绳Bared Wires
裸露的电线Top Wires
顶部电线Spikes
尖刺; 突起Spikes
尖刺; 突起

SPECIFICATION * 规格说明

Height: 1200-3500 mm

Width: 2000-3100 mm

Wire Diameter: 3.2 mm (10 gauge), 4.0 mm (8 gauge)


Mesh Opening: 12.7 x 76.2 mm (0.5"x 3")

Clamp: metal clamp/tension bar covered

Post: square post (60 x 60 x 2.0/2.5/3.0 mm, 80 x 80 x 2.0/2.5/3.0 mm);

rectangular post (40 x 60 x 2.0/2.5/3.0 mm, 40 x 80 x 2.0/2.5/3.0 mm, 60 x 80 x 2.0/2.5/3.0 mm, 80 x 100 x 2.0/2.5/3.0 mm)

Post Cap: metal cap / anti-UV plastic cap

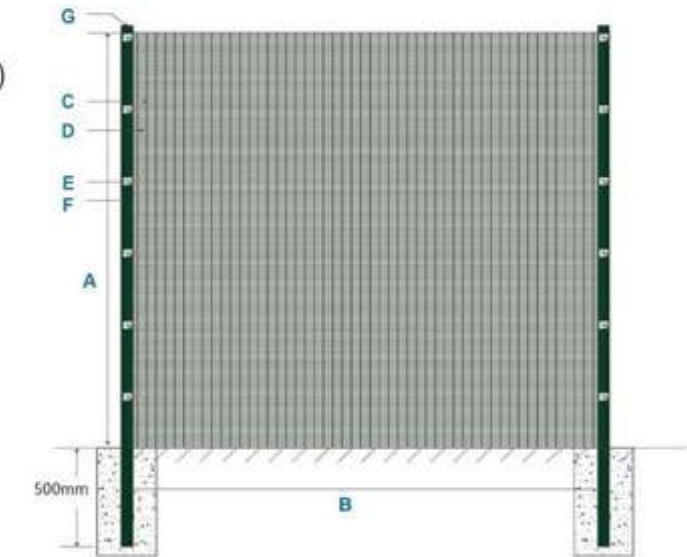

高度: 1200 - 3500 毫米

宽度: 2000 - 3100 毫米

线径: 3.2 毫米 (10 号规格), 4.0 毫米 (8 号规格)

网眼尺寸: 12.7 x 76.2 毫米 (0.5 英寸 x 3 英寸)

夹具: 金属夹具/张力杆覆盖

柱体: 方形柱体 (60 x 60 x 2.0/2.5/3.0 毫米, 80 x 80 x 2.0/2.5/3.0 毫米);

矩形柱体 (40 x 60 x 2.0/2.5/3.0 毫米, 40 x 80 x 2.0/2.5/3.0 毫米, 60 x 80 x 2.0/2.5/3.0 毫米, 80 x 100 x 2.0/2.5/3.0 毫米)

柱体帽: 金属帽/防紫外线塑料帽

PHOTOES * 照片





868 Fence Anti climb fence 868围栏

868 fence, also called welded double wire fence, 2D security fence, twin wire panel fencing. It is quite popular in Europe countries, like German. Looked from far away, the wire panel is like the regular fencing panel. Nevertheless, unlike traditional welded wire fence as 358 security fence and euro fence, 2D security fence panel welded with two horizontal wires is particularly strong and firm.

358 型高安全性围栏，又称防攀爬围栏，是一种性能卓越、高强度且具有高安全性的焊接金属网围栏。该围栏的名称“358”源于其面板上的网孔尺寸为 3 英寸×0.5 英寸，以及线材直径为 8 号规格（约 76.2 毫米×12.7 毫米×4 毫米）。其设计旨在成为坚固、防攀爬且防切割的屏障，以提供高度的安全防护。



868 FENCE 868围栏

SPECIFICATION * 规格说明

Height x Width panel(mm)	Mesh size (mm)	Wire Diameter (mm)	Post Height (mm)
高度×宽度 面板 (毫米)	网格尺寸 (毫米)	线材直径 (毫米)	柱高 (毫米)
630x2500	50x200	8x2+6 6x2+5	1100
830x2500	50x200	8x2+6 6x2+5	1300
1030x2500	50x200	8x2+6 6x2+5	1500
1230x2500	50x200	8x2+6 6x2+5	1700
1430x2500	50x200	8x2+6 6x2+5	1900
1630x2500	50x200	8x2+6 6x2+5	2100
1830x2500	50x200	8x2+6 6x2+5	2400
2030x2500	50x200	8x2+6 6x2+5	2600
2230x2500	50x200	8x2+6 6x2+5	2800
2430x2500	50x200	8x2+6 6x2+5	3000

DETAILA * 细节

Flat Bar

扁钢条



M-Shaped Plastic Clips

M 形塑料夹子



H-Shaped Plastic Clips

H 形塑料夹子



The Spider Clip

蜘蛛夹子




Metal Clip

金属夹子



FENCE GATE * 栅栏门

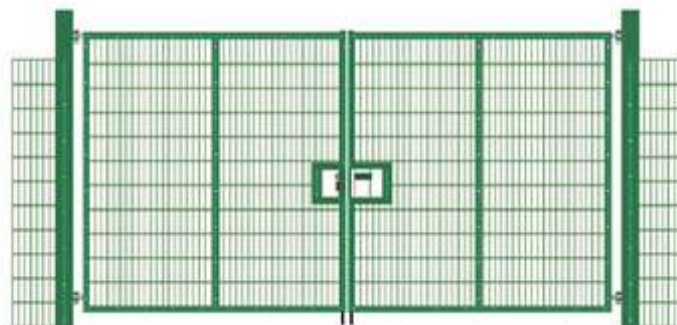Single-door entrance
单开门Double-door entrance
双开门

PHOTOES * 照片

Chain Link Fence
勾花护栏

Chain link fence, also known as cyclone fence, hurricane fence or diamond mesh fence, is a type of woven fence usually made of galvanized or PVC coated steel wire. The wires are woven together to form beautiful diamond patterns. It offers a cost-effective solution for residential and commercial applications.

Typically, the shorter heights are commonly selected for residential uses while the taller heights are most often for commercial uses to provide more security.


链式铁丝网，又称旋风式铁丝网、飓风式铁丝网或菱形网铁丝网，是一种常用的编织式围栏，通常由镀锌或聚氯乙烯涂层的钢丝制成。这些钢丝相互编织在一起，形成精美的菱形图案。它为住宅和商业应用提供了经济实惠的解决方案。

通常，对于住宅用途，会选择较矮的高度；而对于商业用途，则会选择较高的高度，以提供更高的安全性。


Type of chain link Selvedge 链环类型 经编边线



DETAILS 细节

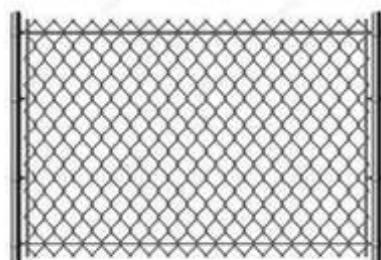Galvanized
镀锌Powder coating
粉末涂层

ACCESSORIES 配件

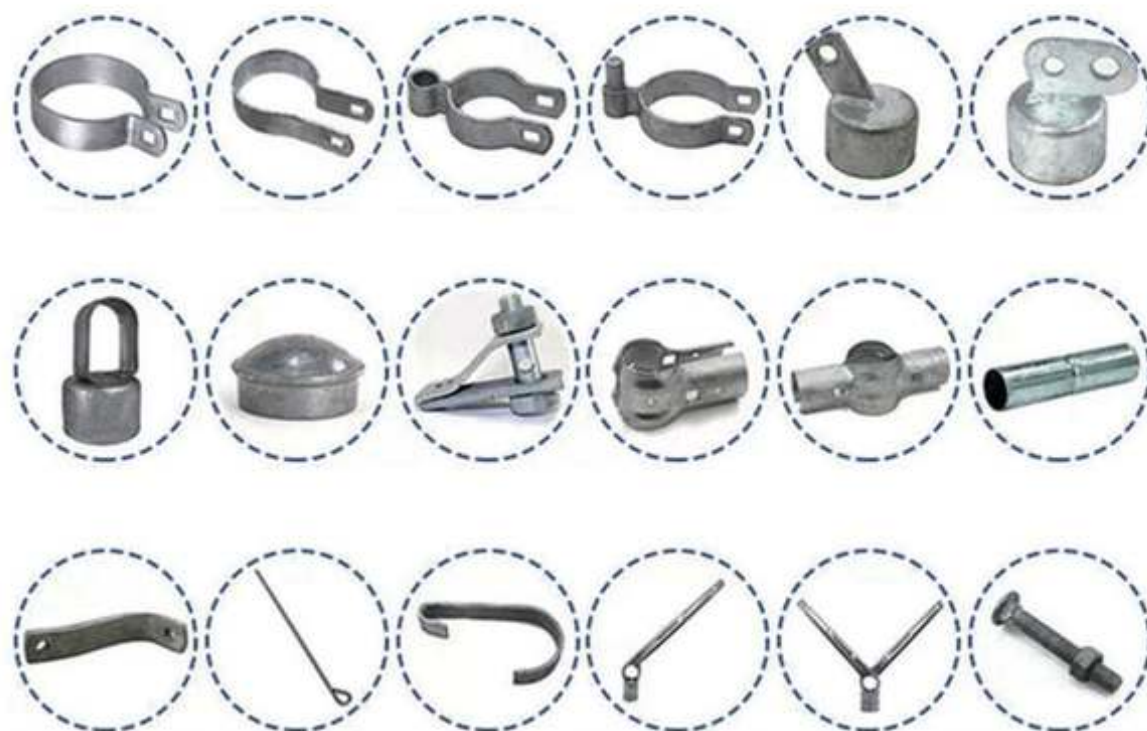

SPECIFICATION 规格说明



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m
Width	0.8 m, 1.0 m, 1.2 m, 1.5 m, 2.0 m
Mesh Size	50 x 50 mm, 60 x 60 mm, 70 x 70 mm
Wire Diameter	3.0-5.0 mm
Post (round)	48 mm OD, 60 mm OD
Frame Tube	32 mm OD, 38 mm OD, etc.



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m
Mesh Size	50 x 50 mm, 60 x 60 mm, 80 x 80 mm
Wire Diameter	3.0-6.0 mm
Post (round)	48 mm OD, 60 mm OD
Frame Tube	32 mm OD, 38 mm OD, etc.



Height	1.2 m, 1.5 m, 1.8 m, 2.0 m, 2.2 m, 2.5 m, 3.0 m
Width	4.0 m, 4.8 m, 6.0 m, 10.0 m
Mesh Size	50 x 50 mm, 60 x 60 mm, 70 x 70 mm
Wire Diameter	3.0-5.0 mm
Post (round)	48 mm OD, 60 mm OD
Frame Tube	32 mm OD, 38 mm OD, etc.

PHOTOES 照片





Name: Metal Chain wire Mesh Chicken yard hen House
Material: low carbon galvanized steel wire
Size: length*width*height

名称: 金属链网式鸡舍母鸡围栏
材质: 低碳镀锌钢丝
尺寸: 长*宽*高

Customizable Logo
可定制标识

The tarpaulin covers to protect from wind and rain, providing a stable and comfortable environment for the poultry.

这些防水布起到了防风防雨的作用，为家禽营造了一个稳定且舒适的生存环境。



2*3*2m

DETAILS * 细节



The mesh ventilation design effectively promotes the circulation of air within the greenhouse.

这种网格通风设计有效地促进了温室内部空气的流通。



ACCESSORIES * 配件



PHOTOES * 配件



This large dog kennel provides ample exercise space while the chain link mesh all around helps prevent mischief and unexpected accidents, while enabling ventilation. Thanks to the sturdy and heavy-duty galvanized steel construction, this dog kennel is durable and built to last. The included top canopy, made of 100% polyethylene, is fire-resistant and UV protected, providing protection from sun, rain, snow and other weather conditions. The hinged door ensures extra security and safety for your dogs thanks to the lockable latch system. Assembly is really easy.

这个大型狗舍提供了充足的活动空间，四周的铁丝网设计有助于防止捣蛋行为和意外事故，同时还能保证通风。得益于坚固耐用的镀锌钢结构，这个狗舍非常耐用且经久不衰。附带的顶篷由 100% 聚乙烯材料制成，具有防火和防紫外线功能，能抵御阳光、雨水、积雪以及其他天气状况。铰链门确保了对狗狗的额外安全防护，得益于可锁定的门闩系统。组装起来非常简单。



DETAILS

* 细节



INSTALLATION

* 安装

1. 面板夹具应水平安装。
1. Panel clamps should be installed horizontally

2. F 极应该从夹子中略微伸出一些。
2. F pole should protrude a little from the clamp

3. 将门安装在门柱的中间位置。
3. Install the gate latch in the middle of the gate post

3. 将门安装在门柱的中间位置。
3. Install the gate latch in the middle of the gate post

- Fix with metal fence ties every 3 holes
- 每隔 3 个孔用金属围栏扣固定一下
- The provided fence is longer than actually needed, so when installing the fence, please pull it tight enough and cut off the excess to make it stronger
- 所提供的围栏长度超过了实际所需的长度，所以在安装围栏时，请将其拉紧至合适程度，并剪掉多余的部分，以使围栏更加坚固。
- Install with 2 people
- 两人即可安装完成

SPECIFICATION

* 规格



Material: Galvanized steel
Roof material: 100% PE
Overall dimensions: 299" x 75.6" x 88.6"
Inner dimensions: 297.2" x 73.2" x 86.6"
Wall height: 176.8"
Ground surface area: 157.2 ft²
Lockable latch system
Chain-link mesh sidewalls
Easy to assemble
Suitable for dogs

材料: 镀锌钢
屋顶材料: 100% 聚乙烯
整体尺寸: 299 英寸 x 75.6 英寸 x 88.6 英寸
内部尺寸: 297.2 英寸 x 73.2 英寸 x 86.6 英寸
墙高: 176.8 英寸
地面面积: 157.2 平方英尺
可锁定的锁扣系统
铁丝网侧墙易于组装
适用于狗狗

Edge protection Fence 边缘防护围栏

Edge Protection Barrier is Common usage scenarios of edge protection systems: commercial construction, industrial construction, residential construction, infrastructure construction, concrete edge protection, steel edge protection timber frames edge protection.

边缘防护屏障是边缘防护系统常见的应用场景：商业建筑、工业建筑、住宅建筑、基础设施建设、混凝土边缘防护、钢结构边缘防护、木框架边缘防护。



DETAILA

※ 细节

Type (类型)

Common specification (通用规格)

Fence hieght (围栏高度)	1m-1.2m
Fence width/length (围栏宽度/长度)	2m-3m
Wire diameter (线材直径)	4mm-7mm
mesh size (网格尺寸)	50x150mm,80x160mm etc.
Post (柱)	42mm or 48mm, wall thickness 1.5mm-2mm
Metarial (材料)	hot dipped galvanized / Powder coated 热镀锌/粉末喷涂
Surface treatment (表面处理)	All joints are welded and sprayed with a galvanized paint to cover any exposes metal 所有接头均采用焊接方式连接，并涂上镀锌漆以覆盖任何裸露的金属部分。

SPECIFICATION ※ 规格说明

Wire Diameter	Mesh size	Length	Height	Round Post	Square Post
5mm x 4mm	75mm x 75mm	1.5m	1.3m		
6mm x 5mm	50mm x 100mm	2.0m	1.4m	48x 2mm	50x50x2mm
8mm x 6mm	50mm x 200mm	2.5m	1.5m	60 x 2mm	60 x60 x 2mm
		3.0m	1.6m		

线径	网格尺寸	长度	高度	圆柱形柱子	方形柱
5mm x 4毫米	75mm x 75毫米	1.5米	1.3米		
6mm x 5毫米	50mm x 100毫米	2.0米	1.4米	48x 2毫米	50x50x2毫米
		2.5米	1.5米	60 x 2毫米	60 x60 x 2毫米
8mm x 6毫米	50mm x 200毫米	3.0米	1.6米		

PHOTOES

※ 照片



- Enhanced Durability: Each panel features bends at the top and bottom edges to provide additional strength, ensuring that our temporary barriers can withstand the demands of a dynamic construction environment.
- Integrated Safety: The inclusion of a toe board at the base of our temporary safety fence is a thoughtful design choice aimed at preventing the descent of fine-grained materials, further contributing to a cleaner and safer worksite.

Wide range of colors. Customizable RAL colors and customized logos make the barrier com



· 提高的耐用性：每个面板的顶部和底部边缘都有弯曲设计，以增强其强度，从而确保我们的临时围栏能够承受动态施工环境的种种考验。

· 整体安全性：我们在临时安全围栏底部设置了踏板，这一设计考量周全，旨在防止细小颗粒物质的掉落，从而进一步营造出更清洁、更安全的工作环境。

丰富的色彩选择。可定制的 RAL 色彩以及可定制的标识使该屏障更具个性化。



Ornamental Fence


锌钢围栏

Steel Fence, also known as tubular steel fence, is a kind of ornamental fence with simple tubular structure vet hiah defense effect, It is made of aalvanized steel tubes or aluminum tubes by using vertical steel pales and horizontal rails to form the fence. It has excellent corrosion & rust resistance performance and enjoys a long service life. Its high strenath makes it an excellent choice for all security purposes while its powder coating surface makes it adapt to most surroundings. Our steel fence is widely used in yarious commercial, residential and industrial applications, including but not limited to, villas, community gardens, schools, factories and other flower beds, lawns, sports stadiums, convention centers, squares, roads, balconies, etc.

钢制围栏，又称管状钢围栏，是一种结构简单、具有较强防护效果的装饰性围栏。它由镀锌钢管或铝管通过使用垂直钢柱和水平横杆组合而成。它具有出色的抗腐蚀和防锈性能，并且使用寿命长。其高强度使其非常适合用于各种安全防护用途，而其粉末涂层表面使其能够适应大多数环境。我们的钢质围栏广泛应用于各种商业、住宅和工业领域，包括但不限于别墅、社区花园、学校、工厂以及其他花坛、草坪、体育场馆、会议中心、广场、道路、阳台等场所。



DIFFERENT TYPES * 不同类型

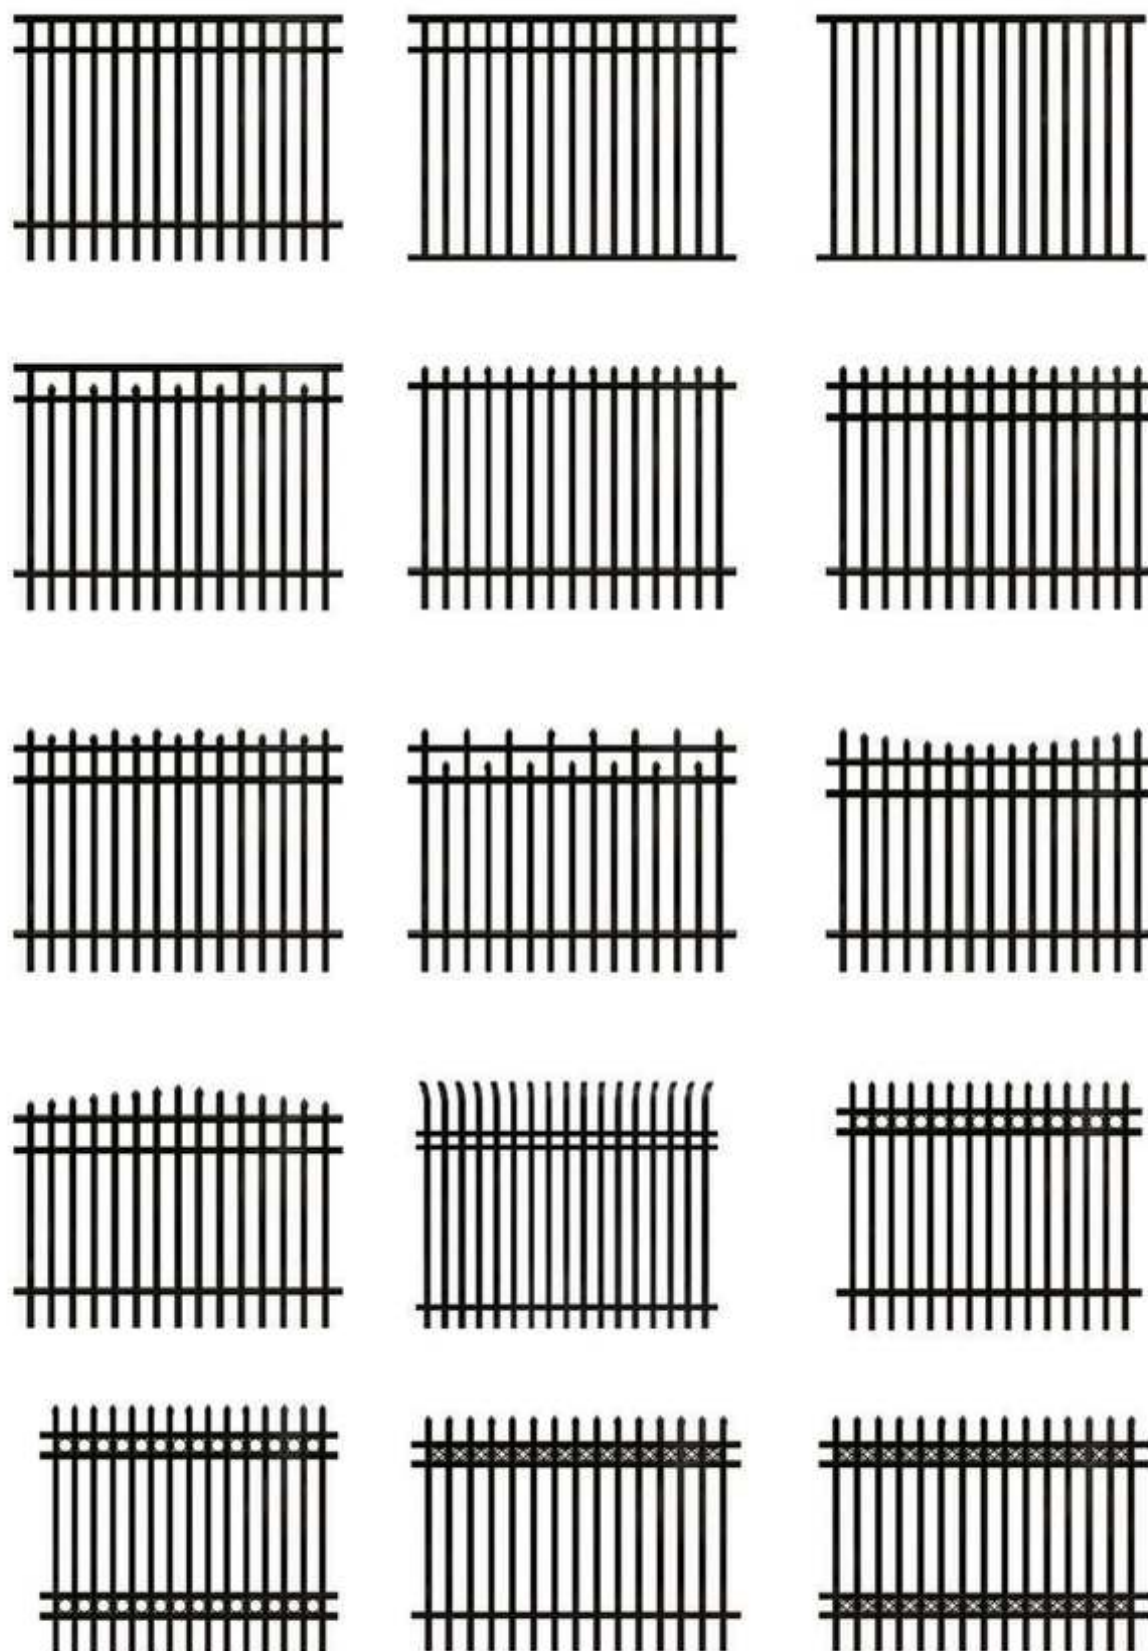

SPECIFICATION * 规格说明

Height: 1200 mm, 1500 mm, 1800 mm, 2100 mm

Width: 1800 mm, 2000 mm, 2400 mm

Vertical Picket: 15 mm x 15 mm, 19 mm x 19 mm, 25 mm x 25 mm; thickness: 0.8-2.0 mm


Horizontal Rail: 30 mm x 30 mm, 40 mm x 40 mm, 45 mm x 45 mm, 2 rails, 3 rails or 4 rails

Vertical Pipe Spacing: 100 mm, 110 mm, 120 mm

Post: 50x50mm, 60mmx60mm, 80mmx80mm, 100x100mm

Fixing: Steel brackets or aluminum brackets

Post Gap: metal rain cap / anti-Uv Pp cap

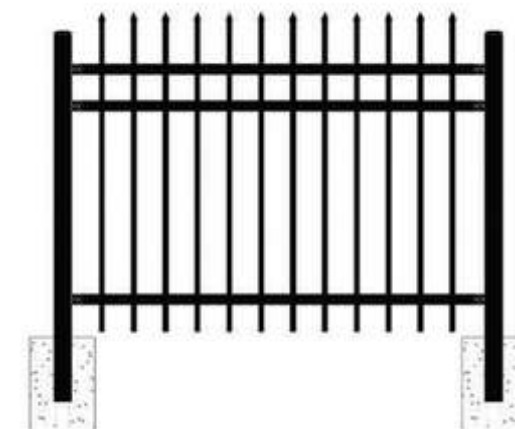

高度: 1200 毫米、1500 毫米、1800 毫米、2100 毫米

宽度: 1800 毫米、2000 毫米、2400 毫米 垂直木桩: 15 毫米 x 15 毫米、19 毫米 x 19 毫米、25 毫米 x 25 毫米; 厚度: 0.8 - 2.0 毫米 水平轨道: 30 毫米 x 30 毫米、40 毫米 x 40 毫米、45 毫米 x 45 毫米、2 根、3 根或 4 根

垂直管道间距: 100 毫米、110 毫米、120 毫米

柱子: 50x50 毫米、60 毫米 x 60 毫米、80 毫米 x 80 毫米、100x100 毫米 固定方式: 钢制支架或铝制支架

柱子间距: 金属防雨帽/防紫外线保护帽

Palisade Fence 欧式护栏



Palisade fencing is a high security fencing prevailing in Europe, Australia and South Africa markets. It is designed to be strong, durable and provide excellent protection against climbing and cutting through. Its imposing appearance, minimal foot holes and robust vertical steel pales ensure its excellent protection against unauthorized access, vandalism and attack.

Typically, it is widely used to address a wide range of perimeter security needs from general purpose to high security purpose and is widely used in various residential, commercial and industrial applications, including but not limited to, highways, airports, docks, schools, sports grounds, leisure facilities.

栅栏式围栏是欧洲、澳大利亚和南非市场中广泛采用的一种高安全性围栏。其设计坚固耐用，能有效防止攀爬和切割破坏。其宏伟的外观、极小的脚踏孔以及坚固的垂直钢质防护栏确保了它能有效抵御未经授权的进入、人为破坏和攻击。

通常情况下，它被广泛用于满足从一般用途到高安全级别的各类周界安全需求，并广泛应用于各种住宅、商业和工业领域，包括但不限于高速公路、机场、码头、学校、运动场、休闲设施等。



DETAILS

细节

Galvanized 镀锌




Powder coating 粉末涂层



Pales 柱子


Our palisade fencing can be divided into three types by pale profile namely, D-section pales, W-section pales and angle steel pales as listed below.

我们的刺篱围栏可以根据立柱的形状分为三种类型，分别是 D 型立柱、W 型立柱和角钢立柱，具体如下所示。

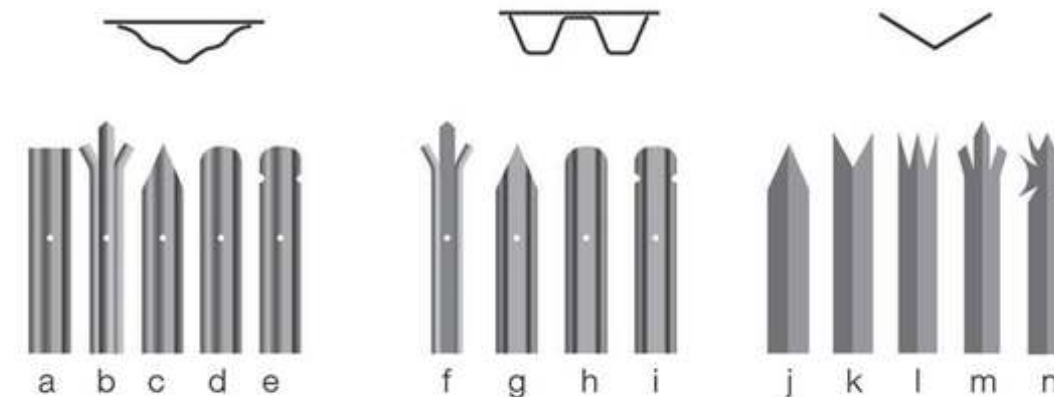


Fish plate
鱼盘

ACCESSORIES * 配件

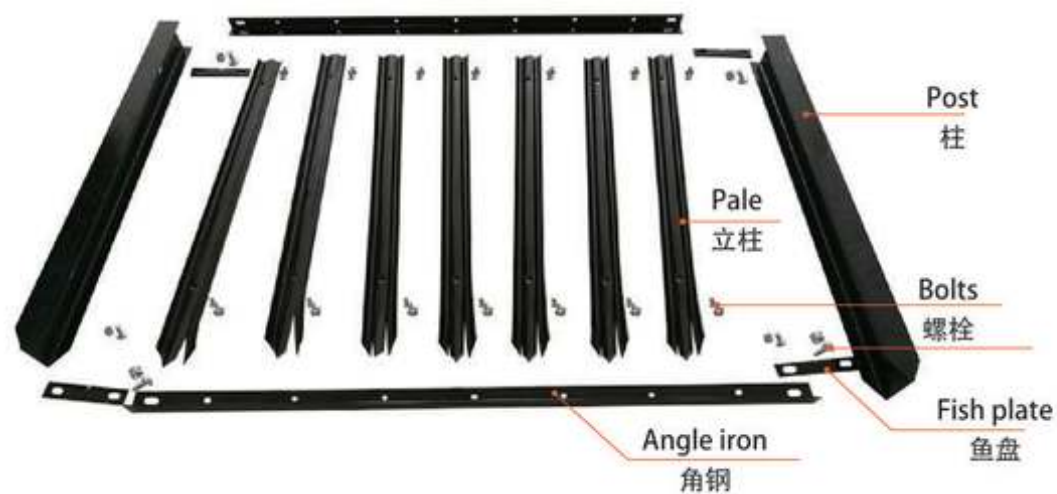

SPECIFICATION * 规格说明

Height: 1800 mm, 2100 mm, 2400 mm, 3000 mm
 Width: 2750 mm
 Pales: w-profile, D-profile and angle steel
 Pale Top: square top, triple pointed top, single pointed top, round top, round & notch top, etc.
 Pale Thickness: 1.5 mm, 2.0 mm, 2.5 mm, 3.0 mm, 3.5 mm
 Horizontal Rail: angle steel (40 mm x 40 mm x 4 mm, 50 mm x 50 mm x 5 mm, 50 mm x 50 mm x 6 mm)
 Post: square post (60 mm x 60 mm, 80 mm x 80 mm, 100 mm x 100 mm), I post (100 mm x 55 mm)
 Connection: fish plate (40 mm x 8 mm x 150 mm)

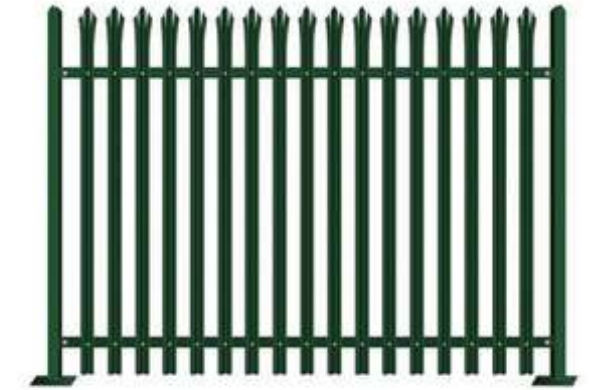

高度：1800 毫米、2100 毫米、2400 毫米、3000 毫米
 宽度：2750 毫米
 柱子：W 型材、D 型材和角钢 褐色顶部：方形顶部、三尖顶、单尖顶、圆形顶部、圆角顶部等
 厚度：1.5 毫米、2.0 毫米、2.5 毫米、3.0 毫米、3.5 毫米
 水平栏杆：角钢（40 毫米×40 毫米×4 毫米、50 毫米×50 毫米×5 毫米、50 毫米×50 毫米×6 毫米）
 柱子：方形柱子（60 毫米×60 毫米、80 毫米×80 毫米、100×100 毫米）、I 柱子（100×55 毫米）
 支撑板：鱼形板（40 毫米×8 毫米×150 毫米）

PHOTOES * 照片





Estate Fencing 扁铁护栏

Estate Fencing is Perfect for country estates, farms, parkland and gardens. It is easy to install, fence posts are driven in or concreted and the rail then simply threaded through and welded. To assemble, you simply install a post (upright) with spade foot on every 1m and thread the horizontal rails through each post. The horizontal rails are notched and fall down into the slots in the posts, and then you simply knock a small clip in with a hammer to hold everything tight and securely.

庄园围栏非常适合乡村庄园、农场、公园绿地和花园使用。安装起来非常简便，只需将围栏柱打入地基或用混凝土固定，然后将栏杆穿过柱子并进行焊接即可。组装时，只需在每 1 米处安装一个带有铲形底座的立柱，并将水平栏杆穿过每个立柱。水平栏杆带有凹槽，会落入立柱的槽内，然后只需用锤子敲入一个小夹子，将所有部件牢固固定即可。




ESTATE FENCING 扁铁护栏

DETAILS 细节



SPECIFICATION 规格

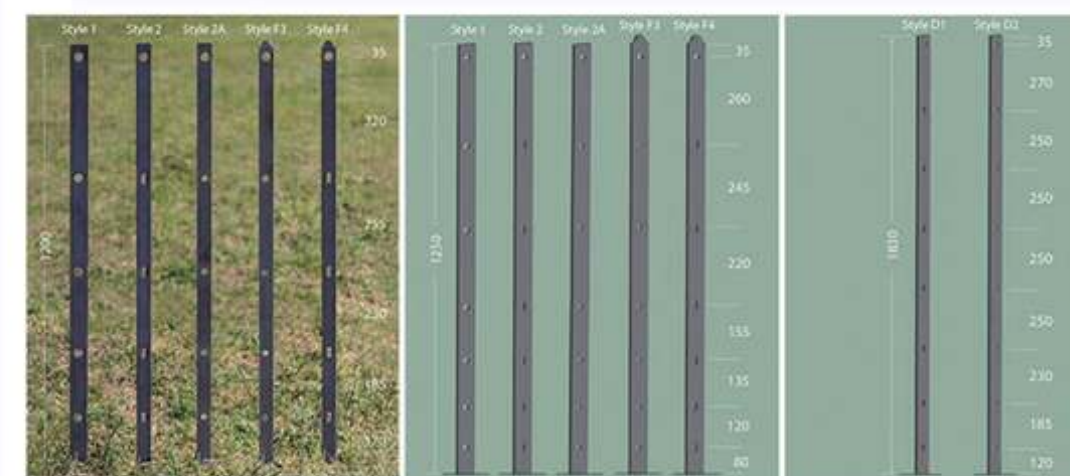

Australia Temporary Fence

澳大利亚临时护栏



FEATURES

特点



Skilled worker 360° hand welding for optimum strength & stability.

熟练工人全方位手持式焊接技术，以实现最佳的强度与稳定性。



finish for most durability even in harshest environments.

对于大多数产品而言，其耐用性甚至能在最恶劣的环境中保持不变。



installation and storing.

安装与存放。

SPECIFICATION

规格说明




Panel Size: 2400 mm (L) * 2100 mm (H).
Frame Size: 32 mm O.D*1.5 mm thickness.
Zinc Coating: 42 microns.
Infill Mesh: 3 rlorizontal, 3 mm verti-cal.
Aperture Spacing: 150 mm x 60 mm spacing.
Surface Treatment:Pre-galvanized 42 microns. Hot-dipped galvanized 90 microns.

面板尺寸：长 2400 毫米 * 宽 2100 毫米。
铝框尺寸：外径 32 毫米 * 厚度 1.5 毫米。
镀锌层厚度：42 微米。
填充网：3 根水平的，每根 3 毫米的垂直网线。
孔间距：150 毫米 x 60 毫米。
表面处理：预镀锌 42 微米。热浸镀锌 90 微米。



Panel Size: 2650 mm (L) * 2100 mm (H).
Frame Size: 32 mm O.D*2.0 mm thickness.
Zinc Coating: 42 microns.
Infill Mesh: 4 rlorizontal, 4 mm vertical.
Aperture Spacing: 150 mm x 60 mm spacing.
Zinc Coating: 42 microns
Surface Treatment:Pre-galvanized 42 microns. Hot-dipped galvanized 90 microns.

面板尺寸：长 2650 毫米 * 宽 2100 毫米。
铝框尺寸：外径 32 毫米 * 厚度 2.0 毫米。
镀锌层：42 微米。
填充网：4 根水平线，每根 4 毫米垂直线。
孔间距：150 毫米x60 毫米。
镀锌层：42 微米
表面处理：预镀锌 42 微米。热浸镀锌 90 微米。

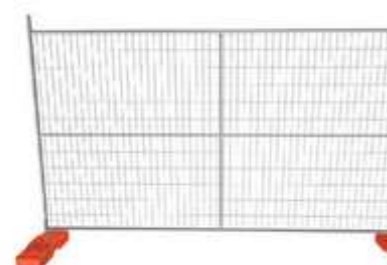

Panel Size: 3300 mm (L) * 2100 mm (H).
Frame Size: 32 mm O.D*2.0 mm thickness.
Infill Mesh: 4 mm horizontal 4 mm vertical
Aperture Spacing: 150 mm x 60 mm spacing.
Surface Treatment:Pre-galvanized 42 microns. Hot-dipped galvanized 90 microns.

面板尺寸：长 3300 毫米 * 宽 2100 毫米。
框架尺寸：外径 32 毫米 * 厚度 2.0 毫米。
填充网：水平 4 毫米、垂直 4 毫米。
孔间距：150 毫米 x 60 毫米。
表面处理：预镀锌 42 微米。热浸镀锌 90 微米。



Panel Size: 1200 mm (L) * 2100 mm (H).
Frame Size: 32 mm O.D*1.5 mm thickness.
Infill Mesh: 3 mm horizontal 3 mm vertical
Aperture Spacing: 150 mm x 60 mm spacing.
Surface Treatment:Pre-galvanized 42 microns. Hot-dipped galvanized 90 microns.

面板尺寸：长 1200 毫米 * 宽 2100 毫米。
框架尺寸：外径 32 毫米 * 厚度 1.5 毫米。
填充网：水平 3 毫米、垂直 3 毫米。
孔间距：150 毫米 x 60 毫米。
表面处理：预镀锌 42 微米。热浸镀锌 90 微米。
适用场景：门处或紧邻门处，或者需要较小面板的场合。

ACCESSORIES * 配件



塑料脚

夹子

遮阳布

钢丝网和带刺铁丝网



扶手

栅栏门

狗酒吧

支撑

PHOTOES * 照片



Canada Temporary Fence

加拿大临时围栏



Canada temporary fence is amade of welded wire mesh panel and square pipes. And there is a square pipe in the middle of welded wire mesh panel to support it and make it more strenath.Our fence panels are designed and constructed to be the strongest and most durable in the industry.

加拿大的临时围栏由焊接金属网板和方管组成。焊接金属网板中间还有一根方管，用于支撑围栏并使其更加坚固。我们的围栏板在设计和建造上旨在成为业内最坚固、最耐用的产品。

FEATURES * 特点

Stable Structure



360° full welding by hand and hot dipped galvanized surface treatment make it dyrable and anti-corrosion.

360° 手工全焊工艺以及热浸镀锌表面处理使其具有良好的耐久性和抗腐蚀性

Easy Installation



Light weight and pre-designed plug-in junction for quick access anywhere on site.

轻巧的设计以及预先安装好的插件式接头，便于在现场任何位置快速连接使用。

Transparent Vision



Various size of welded mesh opening are visible without any sight blocks.

各种尺寸的焊接网孔清晰可见，没有任何遮挡物阻挡视线。


Versatile



Removable panels with flexible isolation angle for any site needing security or privacy.


可拆卸式面板，具有灵活的隔离角度，适用于任何需要安全或隐私保护的场所。

SPECIFICATION * 规格说明

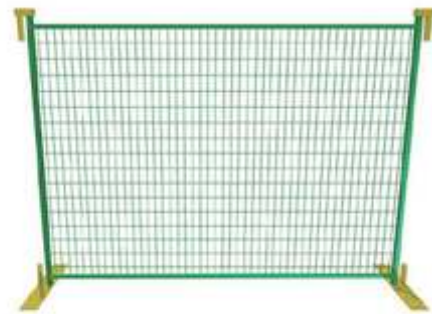

Dimensions (H x L) : 6' x 8'.
 Frame O.D.: 30*30 , 40*40mm optional.
 Frame TH: 2.0-2.5mm
 Middle horizontal pipe: 25 x 25 x 2 mm.
 Wire diameter: 4.0,6.0 mm optional
 Mesh opening: 50 x100,50 x150,75 x150 mm optional.
 Finish: Electric galvanized before powder coated.Hot dipped galvanized after welding.


尺寸 (高 x 宽) : 6 英尺 x 8 英尺。
 框架尺寸: O.D.: 30*30 毫米, 40*40 毫米可选。
 框架厚度: 2.0 - 2.5 毫米
 中间水平管道: 25 x 25 x 2 毫米。
 钢丝直径: 4.0 毫米、6.0 毫米可选
 网眼尺寸: 50 x 100、50 x 150、75 x 150 毫米可选。
 表面处理: 电镀锌后进行粉末喷涂。焊接后进行热浸镀锌。

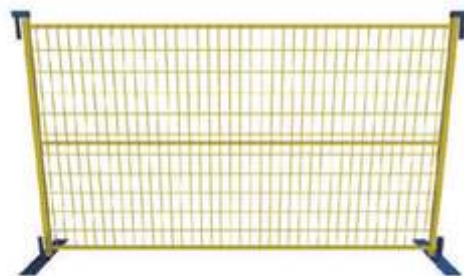

Dimensions (H x L) : 6' x 10'.
 Frame O.D.: 30*30 , 40*40mm optional.
 Frame TH: 2.0-2.5mm
 Middle horizontal pipe: 25 x 25 x 2 mm.
 Wire diameter: 4.0,6.0 mm optional
 Mesh opening: 50 x100,50 x150,75 x150 mm optional.
 Finish: Electric galvanized before powder coated.Hot dipped galvanized after welding.

尺寸 (高 x 宽) : 6 英尺 x 10 英尺。
 框架尺寸: O.D.: 30*30 毫米, 40*40 毫米可选。
 框架厚度: 2.0 - 2.5 毫米
 中间水平管道: 25 x 25 x 2 毫米。
 钢丝直径: 4.0、6.0 毫米可选
 网眼尺寸: 50 x 100、50 x 150、75 x 150 毫米可选。
 表面处理: 电镀锌后进行粉末喷涂。焊接后进行热浸镀锌。

Length : 8', 9.5', 10' optional.
 Height : 6', 6.2', 8', 8.2' optional.
 Frame O.D.: 30*30 , 40*40mm optional.
 Frame TH: 2.0-2.5mm
 Middle horizontal pipe: 25 x 25 x 2 mm.
 Wire diameter: 4.0,6.0 mm optional
 Mesh opening: 50 x100,50 x150,75 x150 mm optional.
 Finish: Electric galvanized before powder coated.Hot dipped galvanized after welding.

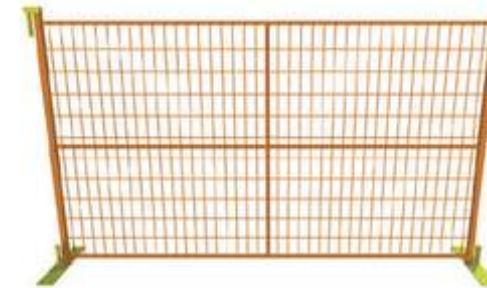

长度: 8 英尺、9.5 英尺、10 英尺 (可选)。
 高度: 6 英尺、6.2 英尺、8 英尺、8.2 英尺 (可选)。
 框架尺寸: O.D.: 30*30 毫米、40*40 毫米 (可选)。
 框架厚度: 2.0 - 2.5 毫米。
 中间水平管: 25 x 25 x 2 毫米。
 钢丝直径: 4.0 毫米、6.0 毫米 (可选)。
 网眼尺寸: 50 x 100、50 x 150、75 x 150 毫米 (可选)。
 表面处理: 电镀锌后进行粉末喷涂。焊接后进行热浸镀锌。

DETAILS * 细节

Top Clip

顶部片



Flat Feet

平足型



Corner Feet

角足型



Crowd Control Barrier 人群控制屏障

Crowd control barriers, made of steel pipes, has firm structure and corrosive resistance surface for secure pedestrian, vehicles and equipment safety in the crowds and heavy traffic.

由钢管制成的人群控制隔离栏具有坚固的结构和耐腐蚀的表面，能够确保人群、车辆和设备在拥挤和繁忙交通环境中的安全。



FEATURE

特征

Flexible Structure 灵活的结构

Combine as many as crowd control barriers you want for your use without any difficult.

您可以随意组合所需的任何数量的人群控制隔离栏，操作起来非常简便。



Pedestrian & Vehicle Gate 行人&车辆入口

Pedestrian or vehicle gates can be supplied according to your sizes to your sizes.


可以根据您的尺寸提供行人通道门或车辆通道门。



Flexible Feet Choice 灵活脚型选择


Fixed or removable feet for choice. Bridge, flat or wheel removable feet options.

可选择固定式或可拆卸式的脚轮。有桥型、平型或带轮的可拆卸脚轮可供选择。

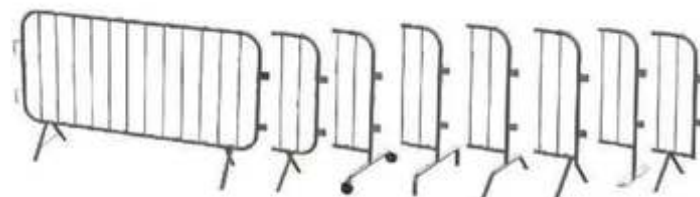

Length: 2.2m.
Height: 1.1 m.
Main frame: 25 mm ODx1.5 mm thickness.
Grill: 10 upright of 16mm OD x1.2 mm thickness.
Upright spacing: 200 mm.

长度：2.2 米。
高度：1.1 米。
主框架：外径 25 毫米，厚度 1.5 毫米。
格栅：10 个立柱，每个立柱外径 16 毫米，厚度 1.2 毫米。
立柱间距：200 毫米。




Length: 2m.
Height: 1.1 m.
Main frame: 32 mm ODx1.5 mm thickness.
Grill: 14 upright of 16mm OD x1.2 mm thickness.
Upright spacing: 106.9 mm.

长度：2 米。
高度：1.1 米。
主框架：外径 32 毫米，厚度 1.5 毫米。
格栅：14 个立柱，每个立柱外径 16 毫米，厚度 1.2 毫米。
立柱间距：106.9 毫米。



Length: 2.2m.
Height: 1.1 m.
Main frame: 32 mm ODx1.5 mm thickness.
Grill: 18 upright of 16mm OD x1.2 mm thickness.
Upright spacing: 110 mm.

长度：2.2 米。
高度：1.1 米。
主框架：外径 32 毫米，厚度 1.5 毫米。
格栅：18 根，每根长 16 毫米外径 x 1.2 毫米厚度。
立柱间距：110 毫米。

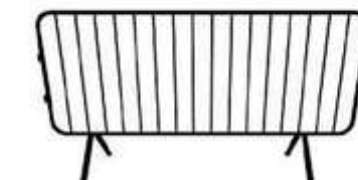

Length: 3.2m.
Height: 1.1 m.
Main frame: 38 mm ODx1.5 mm thickness.
Grill: 16 upright of 16mm OD x1.2 mm thickness.
Upright spacing: 127 mm.

长度：3.2 米。
高度：1.1 米。
主框架：外径 38 毫米，厚度 1.5 毫米。
格栅：16 个立柱，每个立柱外径 16 毫米，厚度 1.2 毫米。
立柱间距：127 毫米。



Length: 2.5m.
Height: 1.1 m.
Main frame: 32 mm ODx1.5 mm thickness.
Grill: 18 upright of 16mm OD x1.2 mm thickness.
Upright spacing: 140 mm.

长度：2.5 米。
高度：1.1 米。
主框架：外径 32 毫米，厚度 1.5 毫米。
格栅：18 根，每根长 16 毫米外径 x 1.2 毫米厚度。
立柱间距：140 毫米。



Length: 2.6m.
Height: 1.1 m.
Main frame: 38 mm ODx2 mm thickness.
Grill: 18 upright of 16mm OD x1.2 mm thickness.
Upright spacing: 129 mm.

长度：2.6 米。
高度：1.1 米。
主框架：外径 38 毫米，厚度 2 毫米。
格栅：18 根，每根长 16 毫米外径 x 1.2 毫米厚度。
格栅间距：129 毫米。

CROWD CONTROL BARRIER 人群控制屏障



Length: 2.6m .
Height: 1.1 m.
Main frame: 38 mm ODx2 mm thickness.
Grill: 19 upright of 16mm OD x1.2 mm thickness.
Upright spacing: 121 mm.
 长度: 2.6 米。
 高度: 1.1 米。
 主框架: 外径 38 毫米x厚度 2 毫米。
 格栅: 19 根, 每根长 16 毫米外径x1.2 毫米厚度。
 格栅间距: 121 毫米。

SPECIFICATION * 规格说明

Length (长度)	2m,2.1m,2.2m,2.5m
Height (高度)	900mm,1000mm,1100mm,1200mm,etc
Outer Tubing (内管)	20mm,25mm,32mm,38mm OD,etc
Inner Tubing (外管)	12mm,14mm,16mm,20mm OD,etc
Spacing (间距)	110mm,115mm,120mm,190mm,200mm
Feet (脚)	Welded Fixed feet,Flat feet,Bridge type feet
Connection 连接	Metal Hook 焊接固定脚、平脚、桥型脚、金属钩
Surface Treatment 表面处理	Hot Dipped Galvanized / Electric Galvanized +Polyester Coated 热浸镀锌 / 电镀锌 + 聚酯涂层


PHOTOES * 照片



Machine And Robot Safety Barrier Fence 机器人安全围栏

Robot fence, also called robot fencesafety fence, if it is used in the workshop,also known as workshop aluminum profileisolation net, workshop partition, alumi.num alloy fence, automatic fence net,etc. Without expansion screws, industrialaluminum profiles are generally used asthe guardrail frame, with mesh in the middle.

机器人围栏, 又称机器人安全围栏, 若应用于车间, 则被称为车间铝型材隔离网、车间隔断、铝合金合金围栏、自动围栏网等。它无需膨胀螺丝, 通常以工业铝型材作为防护栏的框架, 并在其中设置网状结构。

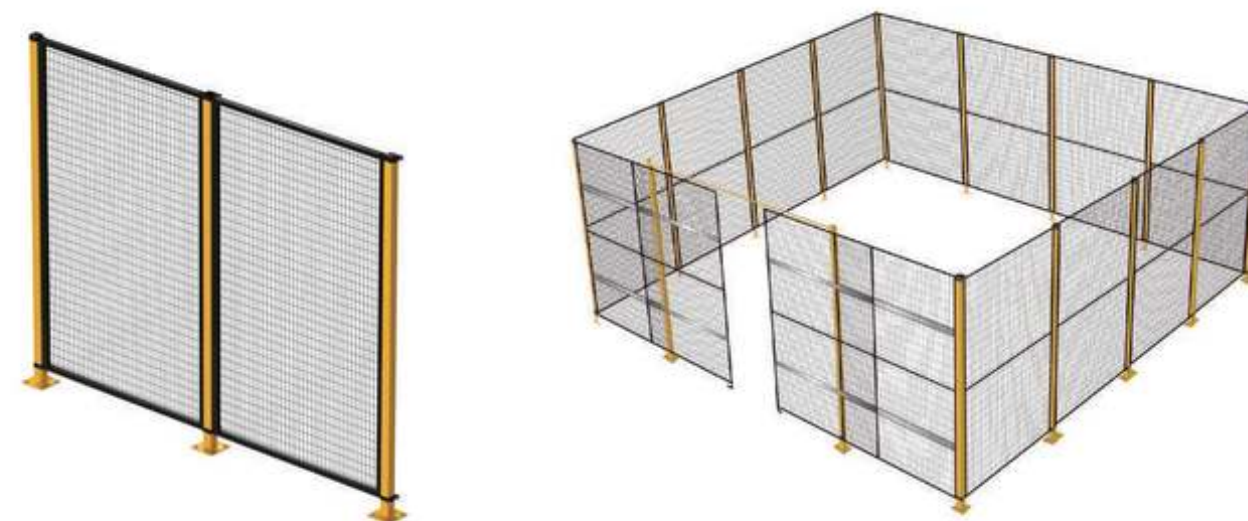

FEATURES * 特点

Reasonable area planning forefficient stor-
age.

Modular installation is adopted for flexible in-
stallation and removal. it can be both tempo-
rarily used and reused

Mesh panels comes in a variety of heights
and widths for your suit to dimensions of al
tallor made warehouse partition systems.

合理的区域规划有助于实现高效存储。
采用模块化安装方式，便于安装和拆卸。既
可临时使用，也可重复利用。
网状面板有多种高度和宽度可供选择，以满
足不同尺寸的大型仓库分区系统需求。

SPECIFICATIONS * 规格说明

Panel Height(面板高度):
2000/2200/2500 mm.

Panel Width(面板宽度):
250/500/750/1000/1250/1500/1750/2000mm.



Wire Diameter(线径):
3.0/4.0/5.0 mm.

Post(柱):
40*40/60*60/customized(定制的).

Color(颜色):
Standard is RAI 9005 black Other RAI
colors are available.
(标准色为 RAI 9005 黑色。此外，还有其他 RAI
颜色可供选择。)

Safety distance
(安全距离)

120/200/850mm

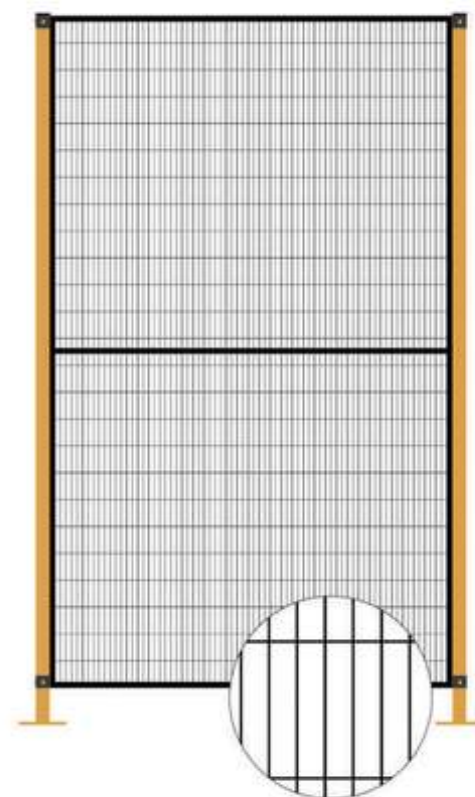

Mesh size(网格尺寸):
20*50m, 20*100mm, 30*30mm,
40*40mm....

CLIPS TYPE * 夹子类型



Consists of a clip secured by a special screw
and captive nut. The clip can slide along the
upright but cannot be separated from it.

由一个通过特殊螺丝和卡紧螺母固定在一
起的夹子组成。该夹子可以在立柱上滑动
，但不能与立柱分离

TYPE(类型): C-40S C-50S C-60S C-80S



Fixed in position with a bolt from the
backside of the bracket. Move the bolt
the side position to create a corner.

用位于支架背面的螺栓将其固定在指
定位置。将螺栓移至侧面位置以形成
一个角。



C-40T

C-50T

C-60T

C-80T

C-46T

Door Clip(with hinge)
带铰链的门夹



An easy-to-install, innovative and eco-
nomical solution, MDF combines
the 40x40 posts with a frameless, spe-
cially-shaped mesh panel and is de-
signed for quick and easy assembly.

这是一种易于安装、创新且经济实
惠的解决方案。MDF 将 40x40 的立
柱与无框、特殊形状的网状面板相
结合，并经过设计，便于快速且简
便地组装。



KICK PLATE TYPE * 踢盘类型



The robust structure prevents the outlet (or inlet) of potentially dangerous materials through the usually free space between panel and floor.

坚固的结构能够防止可能具有危险性的物质从面板与地板之间的通常的空隙中泄漏出来。




Strong post with four holes flexible fixing to the floor

坚固的带有四个孔洞的脚垫，可灵活固定在地板上。




Dust cap
防尘盖

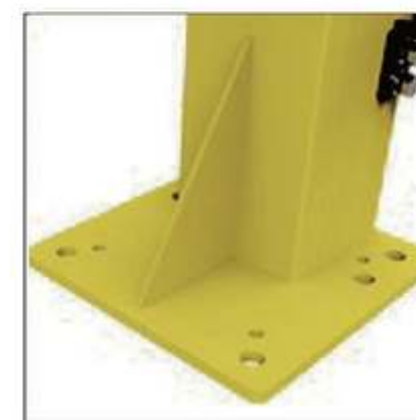


Our strongest post. Four holes fixing to the floor and extra holes for alignment adjustment bolts.

我们的最坚固部件。四个孔固定在地板上，还有额外的孔用于调整螺栓。

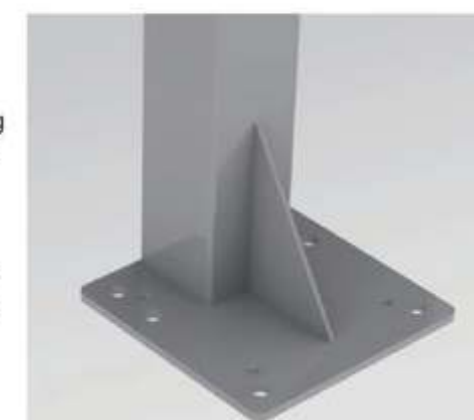

PANELS * 面板

MESH
网格

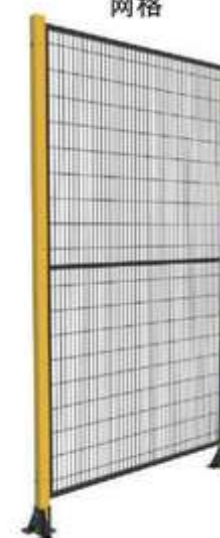

SHEET PANEL
薄板



SHEET METAL+MESH
金属薄板+网格



SHEET METAL+VIEWING POST
金属薄板+观察柱



GASKET
密封圈




DOORS TYPE

* 门的类型

SINGLE-LEAF

单层

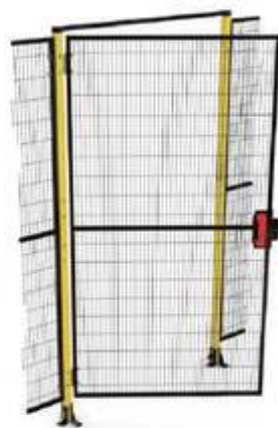

DOUBLE-LEAF

双层



FOLDING DOORS

折叠门



SLIDING DOORS WITH LOWER GUIDE

带有较低导轨的滑动门



SLIDING DOORS WITH UPPER GUIDE

带有上部导向装置的滑动门



OPPOSING SLIDING DOORS WITH UPPER GUIDE

用上部导向装置阻挡的滑动门



LOCKS TYPE

* 锁的类型



Explosion-proof barriers

防爆铁马

This high-quality aluminum barrier is designed for quick installation and features a modular structure, making it portable and ideal for outdoor festivals and road safety. With a load-bearing capacity of 200KG.

这种高品质的铝质隔离栏设计便于快速安装，其采用模块化结构，便于移动，非常适合户外活动和道路安全防护。其承载能力可达 200 千克。



FERTURE

* 特征

1. Foldable: Packs flat (10cm height) for easy transport and storage.
2. Semi-circle top rail: Easy to hold.
3. Smaller holes on vertical perforated plate to avoid hurting fingers.
4. Longer ramp: Extended ramp on the base plate to prevent tripping over.
5. Fall backward prevention step plate: More safety when standing.



- 1.可折叠：可折叠成平状（高度 10 厘米），便于运输和存放。
- 2.半圆形扶手：易于抓握。
- 3.垂直穿孔板上的小孔是为了避免手指受伤而设置的。
- 4.更长的坡道：在底板上增设的延长坡道，以防止滑倒。
- 5.向后跌倒预防垫：站立时更安全。

Performance isolation / Mall isolation / Station isolation

性能隔离 / 购物中心隔离 / 站点隔离

Safe and stable
安全且稳定Foldable
可折叠的High safety factor
高安全系数Prohibition of unauthorized climbing
未经许可禁止攀爬

DETAILA

* 细节



PHOTOES

* 照片



Corral Panels 养殖围栏



Corral panels, also called horse panels, cattle panels, are made from low carbon steel or galvanized steel pipes. The horizontal rails and frames are fully welded together to form a horse panel. They are divided into round, square and oval rail horse panels according to rail shape.

养殖围栏，又称马栏或牛栏，由低碳钢或镀锌钢管制成。水平栏杆和框架通过全焊接方式连接在一起，形成一个马栏板。根据栏杆形状的不同，马栏板分为圆形、方形和椭圆形三种类型。

Safe

安全



Sturdy

坚固



Anti-Corrosion

防腐蚀



Corrosion Resistant

耐腐蚀性




Attractive

有吸引力




Strict Quality Control

严格的质量把控

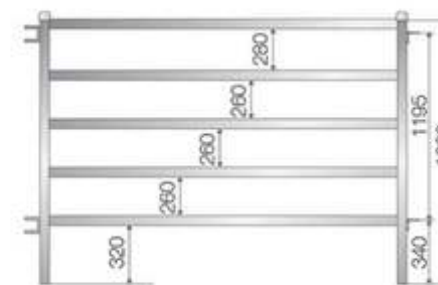


Height * Length: 1.6 x 2.1 m (5 rails).
Frame: 40 x 40 x 1.6 / 2.0 mm ; 50 x 50 x 1.6 / 2.0 mm.
Rails: 40 x 40 x 1.6 / 2.0 mm; 50 x 50 x 1.6 / 2.0 mm.
Finish: hot-dipped galvanized and PVC coating.

高度×长度：1.6 米×2.1 米（5 根立柱）。
框架：40×40×1.6/2.0 毫米；
50×50×1.6/2.0 毫米。
立柱：40×40×1.6/2.0 毫米；
50×50×1.6/2.0 毫米。
表面处理：热浸镀锌和聚氯乙烯涂层。

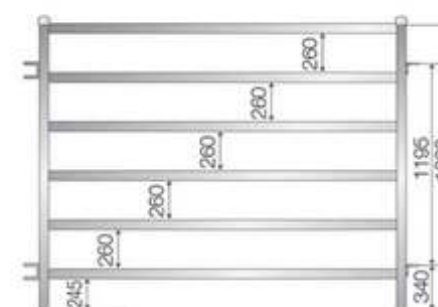


Height * Length: 1.8 x 2.1 m (6 rails); 1.8 x 3.37 m (6 rails).
Frame: 40 x 40 x 1.6 / 2.0 mm ; 50 x 50 x 1.6 / 2.0 mm.
Rails: 40 x 40 x 1.6 / 2.0 mm; 50 x 50 x 1.6 / 2.0 mm.
Finish: hot-dipped galvanized and PVC coating.

高度×长度：1.8 米×2.1 米（6 根立柱）；
1.8 米×3.37 米（6 根立柱）。
框架：40×40×1.6/2.0 毫米；
50×50×1.6/2.0 毫米。
立柱：40×40×1.6/2.0 毫米；
50×50×1.6/2.0 毫米。
表面处理：热浸镀锌和 PVC 涂层。

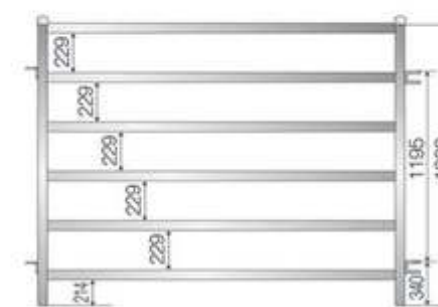

Height * Length: 1.8 x 2.1 m (6 rails); 1.8 x 3.37 m (6 rails).
Frame: 40 x 40 x 1.6 / 2.0 mm ; 50 x 50 x 1.6 / 2.0 mm.
Rails: oval pipes: 30 x 60 x 1.6 / 2.0 mm; 40x80 x 1.6 / 2.0 mm.
Finish: hot-dipped galvanized and PVC coating.

高度×长度：1.8 米×2.1 米（6 根立柱）；
1.8 米×3.37 米（6 根立柱）。
框架：40×40×1.6/2.0 毫米；
50×50×1.6/2.0 毫米。
立柱：椭圆形
管材：30×60×1.6/2.0 毫米；
40×80×1.6/2.0 毫米。
表面处理：热浸镀锌和 PVC 涂层。

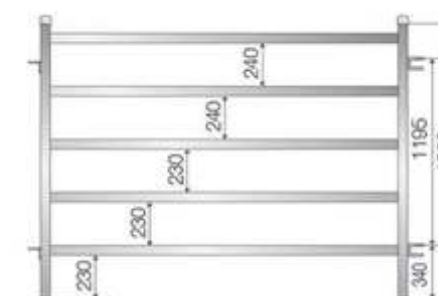

Height * Length: 1.6 x 2.1 m (5 rails).
Frame: 40 x 40 x 1.6 / 2.0 mm ; 50 x 50 x 1.6 / 2.0 mm.
Rails: oval pipes: 30 x 60 x 1.6 / 2.0 mm; 40x80 x 1.6 / 2.0 mm.
Finish: hot-dipped galvanized and PVC coating.

高度×长度：1.6 米×2.1 米（5 根立柱）。
框架：40×40×1.6/2.0 毫米；
50×50×1.6/2.0 毫米。
立柱：椭圆形
管材：30×60×1.6/2.0 毫米；
40×80×1.6/2.0 毫米。
表面处理：热浸镀锌和 PVC 涂层。

SPECIFICATION * 规格说明



Pin Latch

插销锁扣



Chain

链条

PHOTOES * 照片

Razor wire
刀片刺绳

Razor barbed wire is a kind of modern security fencing materials, it made with a sharp steel blade and high strength steel wire. Because of its unique design, makes it difficult to be touched by people, so it can achieve a very good protective effect. It have galvanized iron and stainless steel two materials, and it can coated with PVC. anticorrosion will be more stronger.

剃刀状带刺铁丝网是一种现代的安防围栏材料，由锋利的钢片和高强度钢丝制成。由于其独特的设计，使其难以被触碰，因此能够达到非常好的防护效果。它有两种材质：镀锌铁和不锈钢，并且可以涂上聚氯乙烯涂层，以增强防腐性能。



Cross Type Razor Barbed Wire

交叉型带刺铁丝网

Single Loop Razor Barbed Wire






单环带刺铁丝网

Flat warp razor barbed wire

平纹带刺铁丝网




SPECIFICATION * 规格说明

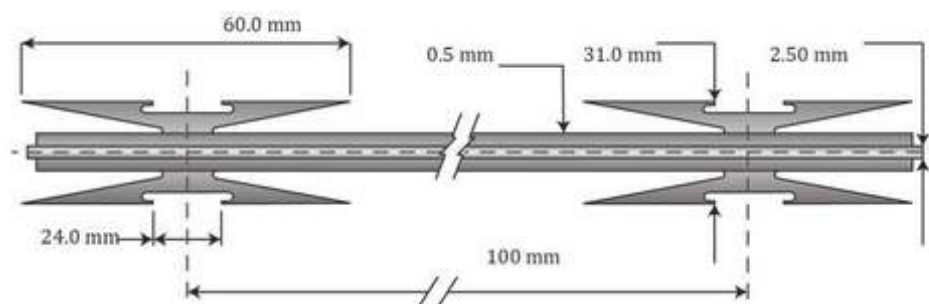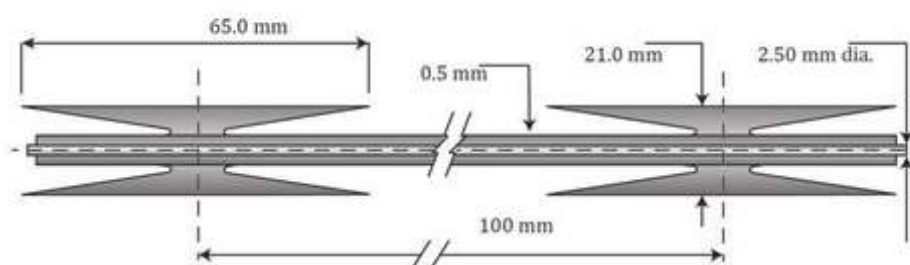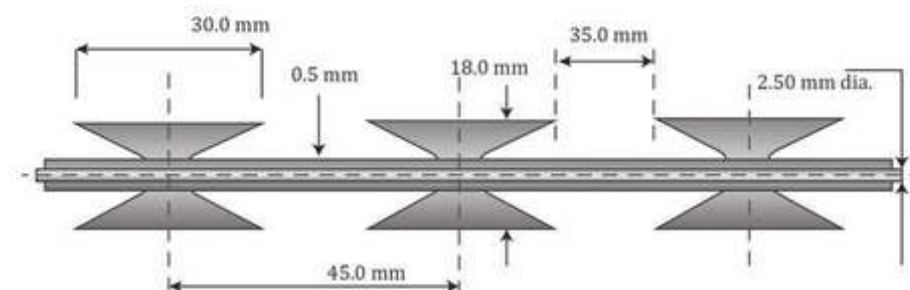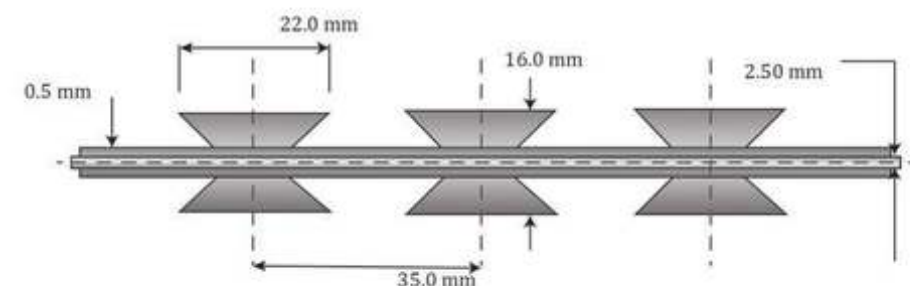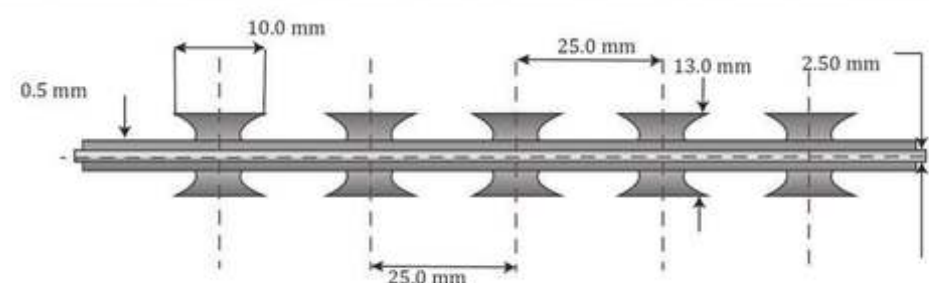Fish-Hook Blade
鱼钩刀片

Long Blade
长刀片

Tear Blade
刀刃

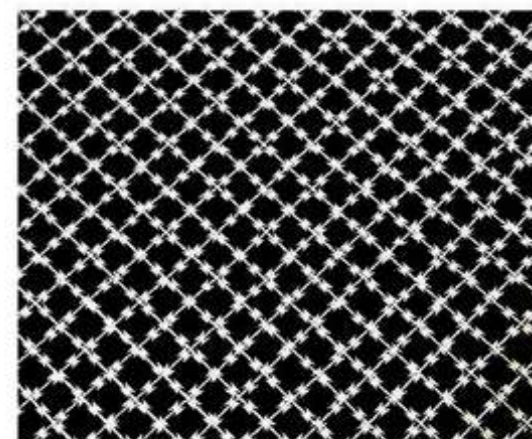Medium blade
中型刀片

Short Blade
短刀片


SPECIFICATION * 规格说明

Straight Razor Wire 垂直刀片刺绳



Hole size:
Bhombus hole: 75x150mm, 150x300mm
etc.
Rectangle hole: 75x150mm, 50x200mm,
100x100mm, 100mmx150mm

孔径尺寸:
邦布斯孔: 75x150 毫米、150x300 毫米等
长方形孔: 75x150 毫米、50x200 毫米、
100x100 毫米、100 毫米x150 毫米

PHOTOES * 照片



Vineyard Post 葡萄柱


The metal post systems produced by our company are excellent for erecting special post systems in vineyards, orchards, and they can be used for hail protection systems at the same time. The metal steel post systems mainly used in vineyard, orchard, grape manor, agriculture plantation and farming. Compared to traditional wooden post systems, it has far more advantages thanks to its design and easy set-up, strong and long life.

我们公司生产的金属立柱系统非常适合在葡萄园、果园中搭建特殊立柱结构，并且还能同时用于防雷系统。这种金属钢柱系统主要用于葡萄园、果园、葡萄庄园、农业种植园以及农田。与传统的木质柱子系统相比，它具有更多优势，这得益于其设计、简便的安装方式、坚固的结构以及长久的使用寿命。



Flower Type Vineyard Post 葡萄柱花型

Strongest design, easy installation and long lasting.
Wire slot that provides complete control of trellis wires.
Reduced installation and set-up costs.
最出色的设计、简便的安装以及持久耐用
带线槽的设计可完全控制天线线缆
降低了安装和设置成本

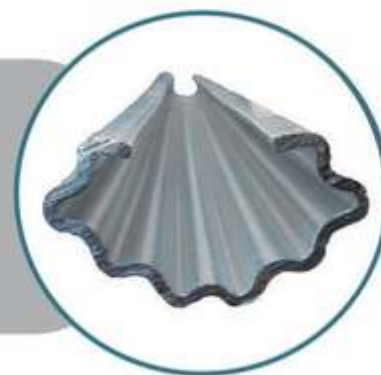

非水平H型孔
Non-horizontal H type holes



水平H型孔
Horizontal H type holes



常见的H型孔
Common H type holes




U Type Vineyard Post U型葡萄柱

Easy installation, simply install wire, Eliminates the need for staples, wire clips, etc. Strong and long lasting. Usually used for the frame plant supporting, grape post, vineyard trellis.

安装简便，只需安装电线即可。无需使用钉子、电线夹等辅助工具。坚固耐用。通常用于框架支撑、葡萄柱、葡萄园棚架等。

Thickness: 1.5mm, 1.8mm, 2.0mm
length: can be customized
The distance of each pair holes: can be customized
Section size: 54x30mm

厚度: 1.5 毫米、1.8 毫米、2.0 毫米
长度: 可定制
每组孔之间的距离: 可定制
规格尺寸: 54x30 毫米

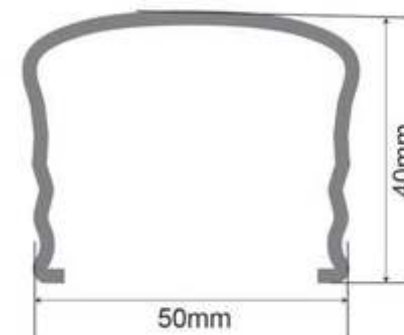

L type holes

L型孔洞



U型葡萄柱
U type vineyard post



U型端柱
U type end post



New design 新设计



ACCESSORIES 配件



PHOTOES 照片



Light Duty Racks

轻型货架

Medium Racks

中型货架

Heavy Racks

重型货架



A shelf is a frame-like structure equipment used for storing goods. Its core value lies in efficiently utilizing space, ensuring the safety of goods, and optimizing warehouse operations. It is widely applied in various scenarios such as warehouses, supermarkets, and factories, serving as the fundamental tool for modern storage management. The maximum utilization of space is achieved, the safety of goods is guaranteed, the efficiency of storage and retrieval is significantly improved, and management is made more refined.


货架是用于存放货物的架式结构设备，核心价值是高效利用空间、保护货物安全、优化仓储作业，广泛应用于仓库、超市、工厂等各类场景，是现代存储管理的基础工具。空间利用率最大化，货物安全有保障，存取效率显著提升，管理精细化落地。

DETAILS

* 细节



column opening method
柱子开孔方法

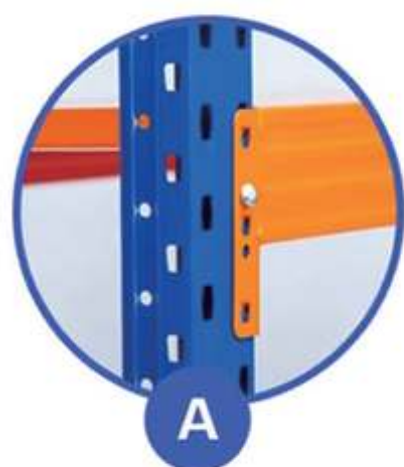

A



B

Easy to disassemble and install,
saving time and labor

易于拆卸和安装，节省时间且减轻劳动强度

Adjustable up and down
可调节上下位置



Installation steps schematic

安装步骤示意图



1. Let's start with two
columns

让我们先从两列
开始吧

2. Insertion of crossbeam

横梁的插入操作

3. Insert the laminates in
sequence

依次插入这些层压板

FEATURES

* 特点



Triangular stabilizing structure on the side and increased stress surface on the bottom, stable and not deformed.

侧面设有三角形支撑结构，底部增加了受力面，整体稳固且不会变形。


WIRE MESH
DECK RACK



METAL PANEL
RACK



SUPPORT BEAM
RACK

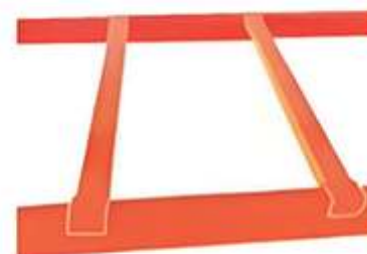

Light Duty Racks 轻型货架

Leight (长)	1200mm,1300mm,2000mm
Width (宽)	400mm,500mm,600mm
Height (高)	2000mm
Layer (层)	4
Load capacity (负载容量)	100~500kg/ (level 层)

Medium Racks 中型货架

Leight (长)	2000mm,2500mm,3000mm
Width (宽)	600mm,800mm,1000mm
Height (高)	2500mm,3000mm,3500mm
Layer (层)	customized
Load capacity (负载容量)	500~800kg/ (level 层)

Heavy Racks 重型货架

Leight (长)	2300mm,2700mm,3000mm,3300mm
Width (宽)	800-1200mm
Height (高)	3500-8500mm
Layer (层)	customized
Load capacity (负载容量)	1-4 ton(吨) / (level 层)




Warehouse
仓库



Factory
工厂



Freight house
货运站

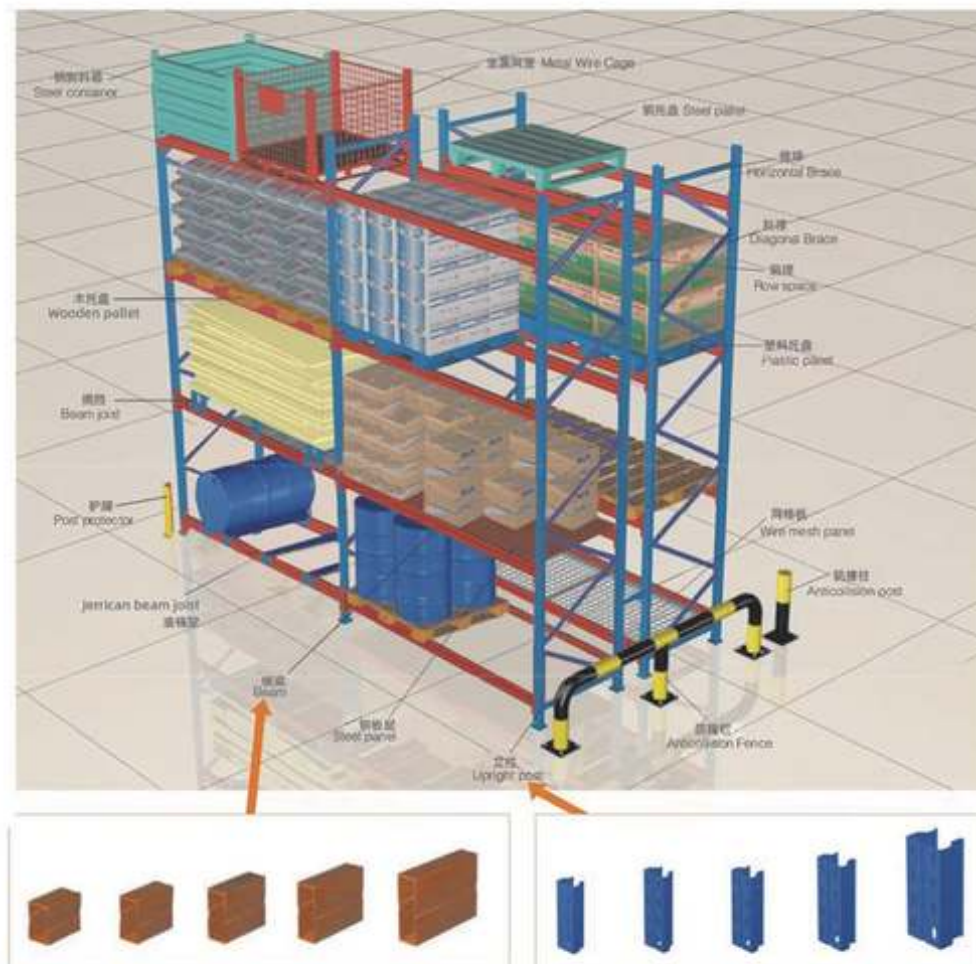

PHOTOES * 照片

Metal Pallet
托盘

The main material is steel or galvanized steel plate, which is formed by special equipment. Various profile support each other, the rivet connection is strengthened. The loadbearing capacity is the strongest among pallets, 100% environmentally friendly, can be recycled and reused, no resources are wasted.



主要材料为钢材或镀锌钢板，这些板材是通过专用设备加工而成的。各种型材相互支撑，通过铆钉连接得以加固。这种托盘的承载能力最强，完全符合环保标准，可回收再利用，不会造成资源浪费。

FEATURES * 特点

- ① Sturdy and durable, easy to load and unload;
- ② Waterproof, moisture-proof and rust-proof;
- ③ Can be customized according to cargo need!

- ① 坚固耐用，装卸方便；
- ② 防水、防潮、防锈；
- ③ 可根据货物需求进行定制！





Half shop-four-way fork
半轮式四向叉车



Half paved-two-way fork
半铺面式双向叉车



pallet-two-way fork
平板式双向叉车



Half bed-four-way fork
半厢式四向叉车



Full paved-two-way fork
全铺面双车道叉车



Fully paved-four-way fork
全铺面四车道叉车



Half paved-two-way fork
半铺面双车道叉车



Half shop-four-way fork
半铺面四车道叉车

COLOUR 颜色



Blue
蓝色



Green
绿色



Black
黑色



White
白色

Three dimensional foot design,
sturdy in use, strong load-bearing
capacity.

三维足部设计，使用稳固，承
载能力强大。



The use of environmentally friendly
plastic spray powder is not easy to
fall off bubbles.

使用环保型塑料喷雾粉剂不易产
生气泡。

Thickened solder joints, with neat,
aesthetically pleasing, and even
surfaces.

加厚的焊点，表面平整、美观且
均匀。



Square tube design with square
tubes at both ends to reduce
wear and damage.

方形管设计，两端采用方形管，
以减少磨损和损坏。